

FEATURE HIGHLIGHTS

- 5500 ANSI LUMENS
- ZOOM RATIO 1.5X
- DIGITAL SHRINK 0.75X
- LAMP LIFE 6,000 HRS AT MOST
- VERTICAL LENS SHIFT 13%
- LAN CONTROL
- 2D KEYSTONE & CORNER FIT




Product Specifications

Articlenumber	9HJKF77.24E	
EAN Code	471 8755 07639 8	
Projection System	DLP Single 0.67" WUXGA	
DMD Typ	DC3 DMD Chip	
Native Resolution	WUXGA 1920 x 1200	
Brightness	5500 ANSI Lumens	
Contrast Ratio *	10,000 : 1	
Display Color	30 Bits (1.07 billion colors)	
Aspect Ratio	Native 16:10 (6 aspect ratio selectable)	
Projection Size	30"~300"	
Throw Ratio	1.39~2.09	
Zoom Ratio	1.5x	
Lens Control	Fixed Lens	
Lens Shift	Vertikal 13%	
Light Source Type	Lamp	
Light Source Life **	Normal 3.500 hours / Eco 5.000 hours / SmartEco 6.000 hours	
Keystone Adjustment	2D, Horizontal / Vertical ± 30 degrees	
Resolution Support	VGA (640 x 480) to 4K (4096 x 2160)	
Horizontal Frequency	15K ~ 102 kHz	
Vertical Scan Rate	23 ~ 120 Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
Built-in Speaker	5W x 1	
Feature	2D Keystone, HDMI/VGA Signal Power ON, LAN Control, Panel Key Lock, HDMI 2.0 (4K compability)	
Dimensions (W x H x D)	360 x 121 x 259 mm	
Weight	3,7 kg	
Power Supply	100~ 240 V AC, 50/60 Hz	
Power Consumption	Max 440W / Normal 420W / Eco 330W	
Standby Power Consumption	Normal < 0.5W / Network <2W	
Audible Noise	39 / 36 dBA	
Operating Temperature	0 ~ 40°C	
On-Screen Display Languages	Arabic / Bulgarian / Croatian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hindi / Hungarian / Italian / Indonesian / Japanese / Korean / Norwegian / Polish / Portuguese / Romanian / Russian / Simplified Chinese / Spanish / Swedish / Turkish / Thai / Traditional Chinese (28 Languages)	
Accessories	Standard	Optional
	Remote Control	Carry Bag
	Power Cord (1,8m)	Spare Lamp Kit
	AAA Battery x 2	QCast Mirror (QP20)
	User Manual CD	Instashow (WDC10)
	Installation Guide	RS232 Cable
	Warranty Card	3D Glasses
Guarantee	36 month	

* The Contrast is measure by Full On Full Off standard.

** LightSource life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

Input and Output Terminals

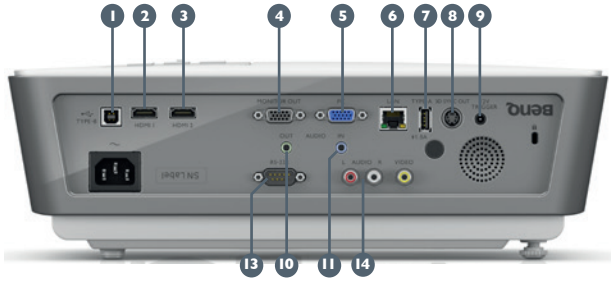


- ① USB (Type B)
- ② HDMI 1
- ③ HDMI 2
- ④ Monitor out (D-sub 15pin)
- ⑤ PC in (D-sub 15pin)
- ⑥ LAN
- ⑦ USB (Type A)
- ⑧ 3D Sync out
- ⑨ DC 12V Trigger (3.5mm Jack)
- ⑩ Audio out (Mini Jack)
- ⑪ Audio in (Mini Jack) Speaker 5W
- ⑫ Speaker 5W
- ⑬ RS-232
- ⑭ Audio L/R in (RCA)
- ⑮ Composite Video in (RCA)
- ⑯ Kensington anti-theft lock slot

Dimensions





Distance Chart

Screen				Distance from screen (mm)			Offset (mm)
Diagonal		W (mm)	H (mm)	Min length (max. zoom)	Average	Max length (min. zoom)	
Inch	mm						
30	762	646	404	898	1124	1351	40
40	1016	862	538	1198	1499	1801	54
50	1270	1077	673	1497	1874	2251	67
60	1524	1292	808	1796	2249	2701	81
80	2032	1723	1077	2395	2998	3601	108
100	2540	2154	1346	2994	3748	4502	135
120	3048	2585	1615	3593	4497	5402	162
150	3810	3231	2019	4491	5622	6753	202
200	5080	4308	2692	5988	7496	9003	269
250	6350	5385	3365	7485	9370	11254	337
300	7620	6462	4039	8982	11243	13505	404

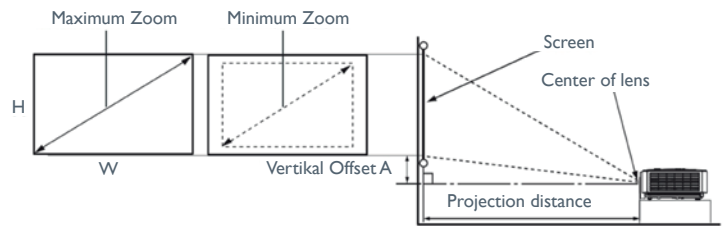

Ceiling Mount Chart

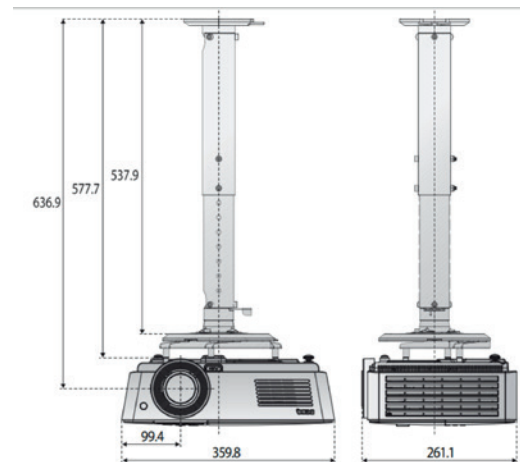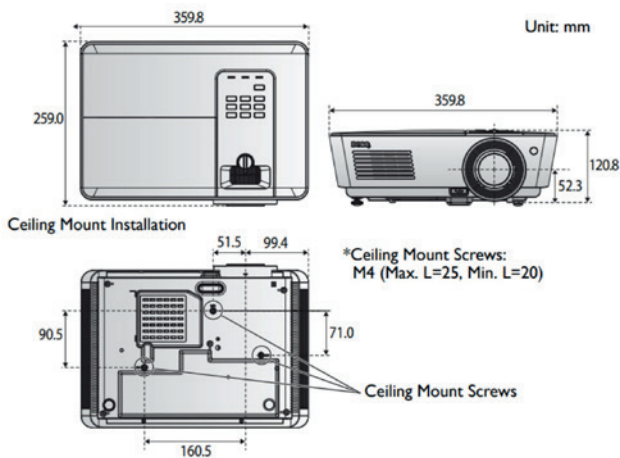

BenQ Europe B.V.

Meerenerkerweg 1-17
5652 AR Eindhoven
The Netherlands
Tel: +31 88 8889200

BenQ.eu

© 2018 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Latest Update: 2018-10-25

BENQ